
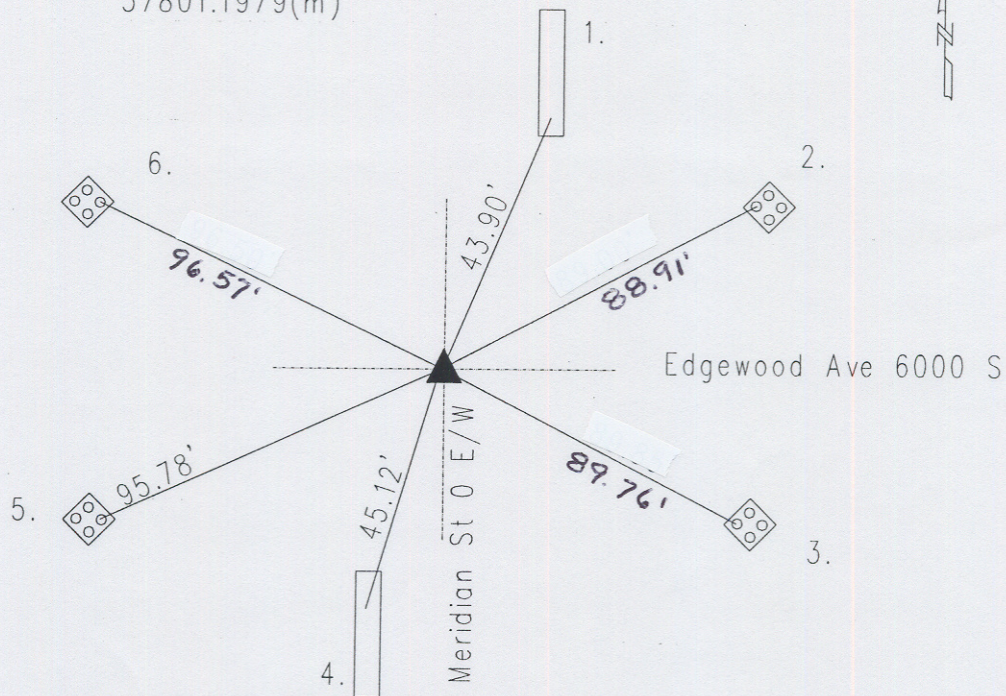


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 12 TOWNSHIP 14 RANGE 3
DATE: 3-13-08
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-2-98

IN. S.P.C. E ZONE NAD '83
NAME: 14031201
N: 491985.0860(m)
E: 57801.1979(m)

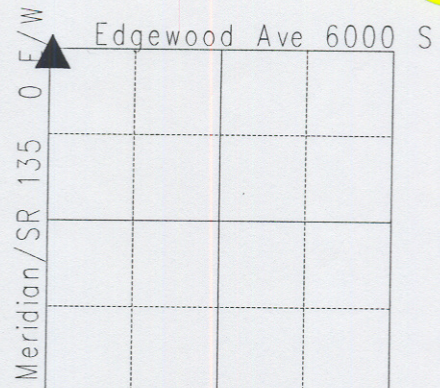

Original post set 1820 by Laughlin with witnesses: 14" beech N 16 E 40 links, 12" dogwood S 12 W 34 links per Marion County Atlas pg. 5. McCoyner 3-14-1898 called stone with witness: 18" locust S 76 W 76.8 links per Perry Township Legal Survey Book pg. 65. 9-16-48 by Miller called an 8" C.I. plate. 5-4-70 McLand called brass plug. Miller 6-11-75 called same. 2-27-87 Greene called same. Kiste 5-16-91 called same. Excavated 7-10-92 by Wilcoxen and Harrison set per SR 135 contruction project. Re-tied 10-2-98 by Kiste. Re-tied 4-5-03 by Wilcoxen. 14031201

REF.	DISTANCE	DESCRIPTION
1.	43.90'	Cut 'x' S-end of concrete median
2.	88.91'	Cut 'x' W-bolt of signal base
3.	89.76'	Cut 'x' W-bolt of signal base
4.	45.12'	Cut 'x' N-end concrete median
5.	95.78'	Cut 'x' E-bolt of signal base
6.	96.57'	Cut 'x' E-bolt of signal base